


DC Power Supply

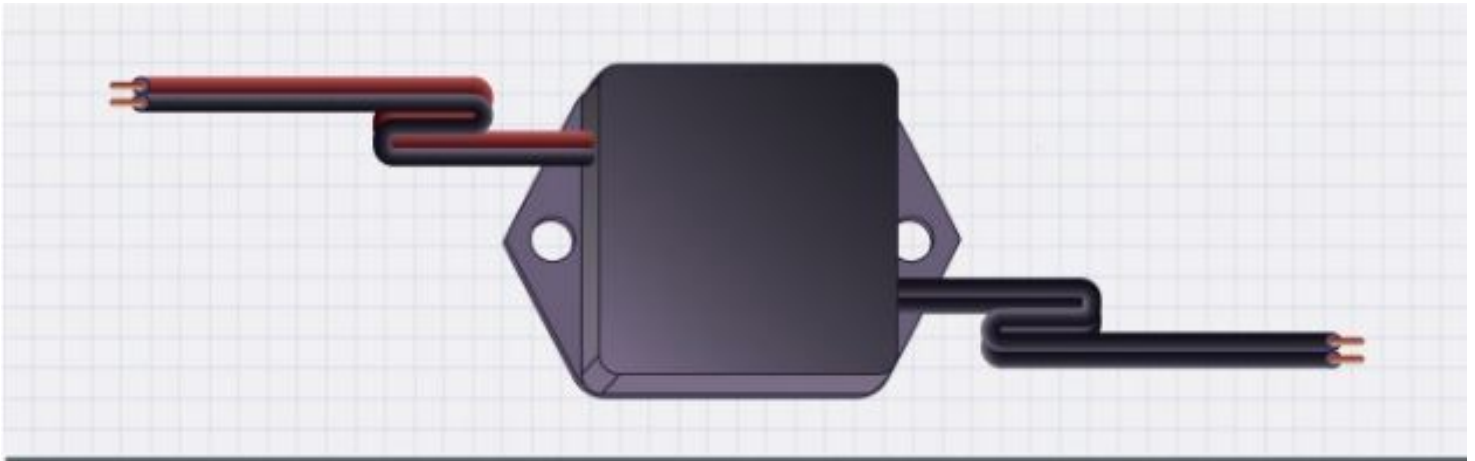

- Mountable/portable
- Compact in size
- Temperature Range: -22°F to 185°F (-30°C to 85° C)
- Accepts variety of input voltages
- High Efficiency
- Reverse Polarity protection
- No load protection
- Short circuiting protection
- Self compensating
- Quiet
- Small form factor
- CE compliant
- 6V, 12V, 24V inputs available

Driver Ranges

Model	Light Tape Range		Input			Output
	Imperial	Metric	V	Amps	Watts	Current
DC 2000	1200-2000 in ²	7741.92 - 12903.2 cm ²	12v	6	72	8752 mA
DC 1500	800-1200 in ²	5161.28 - 7741.92 cm ²	12v	3.6	45	6564 mA
DC 750	500- 800 in ²	3225.8 - 5161.28 cm ²	12v	2.5	30	3282 mA
DC 500	300- 500 in ²	967.74 - 3,225.8 cm ²	12v	1.5	18	2188 mA
DC-300	150-300 in ²	1612-1935 cm ²	12v	0.9	10.8	1312 mA
DC 150	75 - 150 in ²	516.12 - 967.74 cm ²	12v	0.5	6	656 mA
DC100	50 - 100 in ²	290.32 - 516.12 cm ²	12v	0.4	5	438 mA
DC 50	25 - 50 in ²	116.12 - 290.32 cm ²	12v	0.16	2	219 mA
DC 20	10 - 25 in ²	6.45 - 116.12 cm ²	12v	0.08	1	88 mA
9V	≤ 30 in ²	6.45 - 212.9 cm ²	9v	0.2	2	144 mA

VAC Ouput is 260v at 800hz

Power Supply Dimensions

Model	Length		Width		Height		Weight
DC 2000	6.5	16.51 cm	4.25 in	10.795 cm	2 in	5 cm	2.65 lb
DC 1500	6 in	15.24 cm	3.875 in	9.84 cm	1.5 in	3.8 cm	1.85 lb
DC 750	4 in	10.1 cm	3.875 in	9.84 cm	1.5 in	3.8 cm	.95 lb
DC 500	4 in	10.1 cm	3.125 in	8 cm	1.5 in	3.8 cm	.7 lb
DC-300	4 in	10.1 cm	2.125 in	5.4 cm	1.5 in	3.8 cm	.9 lb
DC 150	4 in	10.1 cm	2 in	5 cm	1.5 in	3.8 cm	.6 lb
DC100	3 in	7.6 cm	2 in	5 cm	1.5 in	3.8 cm	.45 lb
DC 50	3 in	7.6 cm	1.6 in	4 cm	1 in	2.5 cm	.2 lb
DC 20	1.75 in	4.4 cm	1 in	2.5 cm	.8 in	2 cm	.1 lb
9V	2.3 in	5.8 cm	2.3 in	5.8 cm	1 in	2.5 cm	.15 lb