

PEDESTRIAN BRIDGE
SOUTH AFRICA

Light  **Tape**[®]
Electro-LuminX[®]

Exterior Accent Lighting

Achieve uninterrupted and completely even illumination with just one connection up to 100 feet in length. The Light Tape[®] Snap-N-Light[™] linear accent lighting system is available in a number of colors and widths. Utilizing state of the art barrier technology from Honeywell[®] International and Bayer[®] for superior weatherability, Snap-N-Light[™] delivers superior nighttime visibility without contributing to light pollution.



Looks Like Tape, Lights Like Neon™

ONE CONNECTION PER 100 FEET

Extremely easy to install. Arrives in rolls, terminated to your desired illuminated length. Peel and stick on smooth surfaces, install 100 feet in minutes. Other surfaces such as brick, utilize our mounting clips and snap the Light Tape® extrusion into place.

MULTIPLE SEGMENTS AND JUST ONE POWER SUPPLY

No need for multiple power drops and power supply locations. It is possible to operate dozens of runs from one power supply and electrical drop. Strategically placed power supplies significantly reduce installation time.

OUTDOOR IP67 RATED

We manufacture a proprietary mounting channel starting with a high-grade outdoor rated polycarbonate polymer from Bayer®. The closed system allows Light Tape® to 'expand and contract' with the weather, preventing de-lamination while further shielding from the environment.

ENERGY EFFICIENT

At one watt a meter, Light Tape® is a solid-state lighting technology like no other light. Like a neon laser, Light Tape® is perfect to accentuate your building. The entire surface illuminates versus a single point light source like LED's, which can be harsh to the eye.

Snap-N-Light™

Simple system equipped with two levels of barrier to protect Light Tape® lamps from the harshest environments.



MOUNTING CHANNEL

Our mounting channel comes complete with mounting clip accessories for fixing to brick, concrete and wooden structures. The Snap-n-Light™ system is made from polycarbonate by Bayer® with UV stabilizers. The Light Tape® arrives fitted in the mounting channel with connector attached, ready to mount and connect to power.




Exterior Lamination


UV STABLE MATERIALS

Snap-n-Light™ is an IP67 rated exterior solid-state linear lighting system that is UV stable and fade resistant colors. Light Tape® is laminated in Hyrdoblock™, the highest fluoropolymer moisture barrier in the world and made by Honeywell® International, for the final layer of protection.

Light Tape® will change the way you think about a light bulb.




Even illumination: a uniform light source without the need for diffusion, no hot-spots at any size!



Easy Installation: Our technology is easy to install. Light Tape® illuminates up to 150 feet on a single connection.



No heat: Unlike LEDs, Light Tape® can run for 40,000 hours and never gets hot. Ability to withstand extreme temperatures.




Energy efficient: Light Tape® uses 40% less power than traditional LEDs



Made in the USA: Built with pride, manufactured to last.



Unmatched Durability: Impact and vibration resistant, heavy load capable. Light Tape® can withstand punctures and still illuminate.



Thinner than a credit card and flexible. Fit into specs others cannot.



Custom shapes: allow your creativity to determine your light's design.

Light Tape® stands alone in the world of EL.


Compared to alternate EL technologies, no one comes close to our quality. We start by employing only the best materials to deliver shocking performance. We have a unique manufacturing process, a departure from traditional batch silk screening. Would you want your light made on the same machine as a t-shirt printer? We don't either, but that is how most alternate lamps are made.

NOVEL CHEMISTRY

Light Tape®'s one-of-a-kind chemistry is protected by numerous patents. Our material's layers are bonded at the chemical level, producing a brighter, more durable lighting source. Light Tape® is a true solid state system. Other EL producers glue the rear electrode to the material, which easily separates with flexing or temperature changes, leading to electrical failure.

BEST MATERIALS

Only the best phosphors and conductive films are used in Light Tape®. The combination produces a brighter, more durable light that uses less energy. Other EL producers use low grade phosphors and poor conductive materials resulting in non-uniformity of brightness and poor energy efficiency, not to mention much shorter lifetimes.

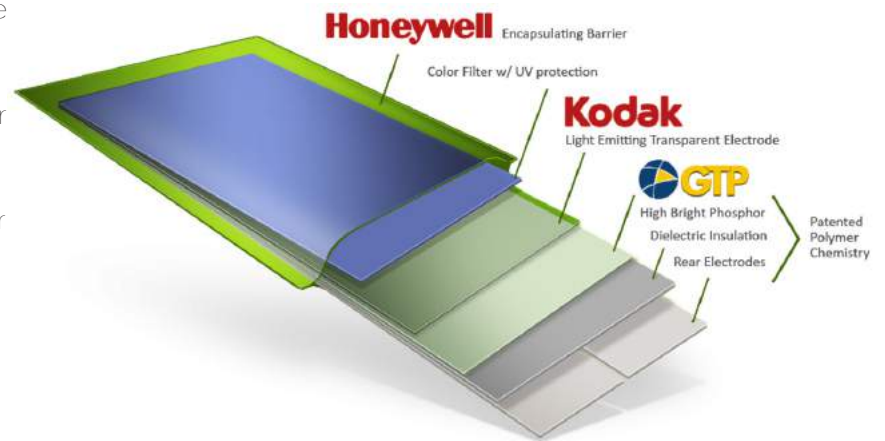

AMERICAN MADE

Light Tape® is manufactured in the United States under strict quality control standards. Our own proprietary production methods create an electroluminescent light source unlike any other in the world.

UNPRECEDENTED LIFETIMES

We are producing a lamp that is built to last, able to withstand the toughest applications.




There are dozens of things that cause a lamp to fail, but most do not affect Light Tape®.

Energy Consumption

Light Tape® is a flat capacitor emitting light only on the surface. Versus other light sources like an LED who directionally emit light with a great deal of the desired light either wasted or diffused for even illumination. When comparing the surface brightness of an accent light, there is nothing more efficient.

Light Tape is off the charts

HIERARCHY OF TRADITIONAL MEASUREMENT OF BRIGHTNESS

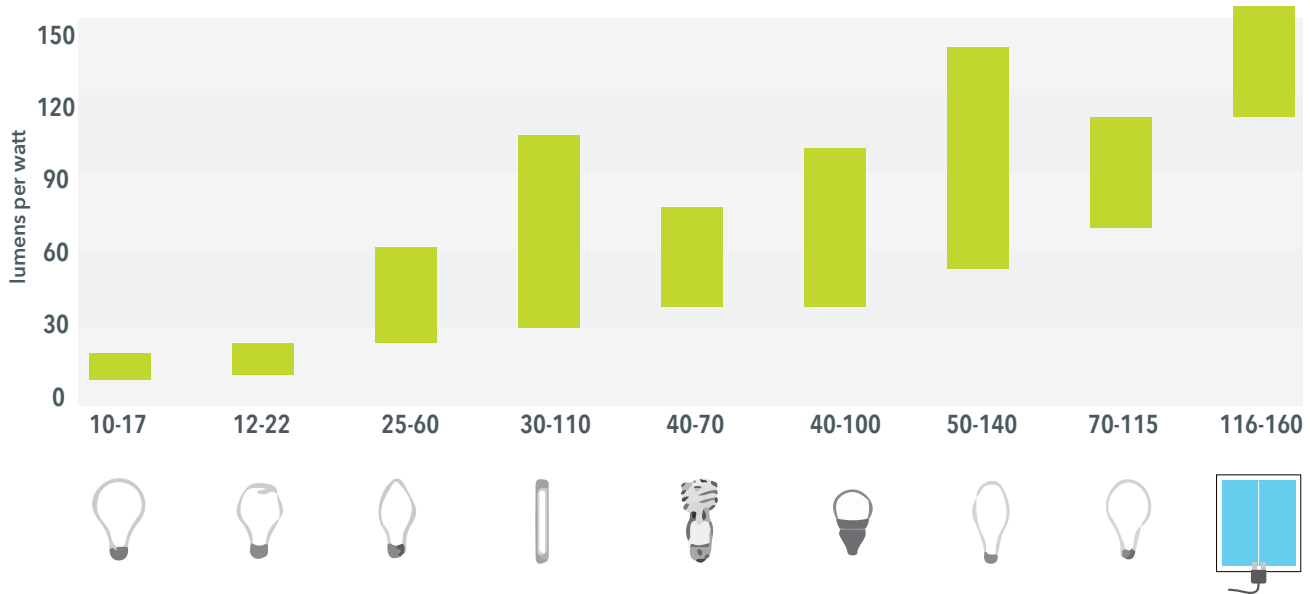

LIGHT TAPE VS. LED ENERGY COMPARISON BY AREA

	LIGHT TAPE		LEDS			
ILLUMINATED WIDTH	2.54 cm	0.8 cm	1.27 cm	0.8 cm	100% backlit	edge lit
AREA/LENGTH	1 linear meter	1 linear meter	1 linear meter	1 linear meter	square meter	square meter
ILLUMINATION SOURCE	100% phosphors	30 LEDs	100% phosphors	60 LEDs	100% phosphors	240 LEDs
CURRENT - AMPS	0.01	3	0.005	6	0.5	24
TOTAL WATTS	1	7.2	0.5	14.4	44	57.6
ILLUMINATION COVERAGE	100% even	2 cm gaps	100% even	1 cm gaps	100% even	30% dimmer in center

*Light Tape® data based on full brightness, consumption results can be much lower when dimming.

LIGHT TAPE TOTAL POWER CONSUMPTION BY AREA

BRIGHTNESS	W/in ²	mA/in ²	W/cm ²	mA/cm ²
HIGH	0.028	0.342	0.0043	0.0530
AVERAGE	0.016	0.191	0.0025	0.0296
LOW	0.011	0.133	0.0017	0.020

Light Tape® has a very linear power consumption. With every increase in area there is an equal increase in energy required to illuminate. Multiply the illuminated surface area to get total watts and amps.

Light Tape® Standard Sizes

ITEM NUMBER	ILLUMINATED WIDTH - B	LAMINATED WIDTH - A
lt-025	0.25" (6.35mm)	0.75" (19.05mm)
lt-050	0.5" (12.7mm)	1.0" (25.4mm)
lt-100	1" (25.4mm)	1.5" (38.1mm)
lt-150	1.5" (38mm)	2" (5.07cm)
lt-200	2" (5.08cm)	2.5" (6.35cm)
lt-300	3" (7.62cm)	3.5" (8.89cm)
lt-400	4" (10.16cm)	4.5" (11.43cm)
lt-600	6" (15.24cm)	6.5" (16.51cm)
p-lt-1200	12" (30.48cm)	12.5"(31.75cm)
p-lt-1800	18" (45.72cm)	18.5"(46.99cm)
p-lt-2400	24" (60.96cm)	24.5"(62.23cm)
*custom widths available		


WHEN ORDERING, PLEASE SPECIFY:

- Installation location - Interior (INT) or Exterior (EXT)
- Desired illuminated color
- Illuminated width item number.
- What length for each Light Tape lamp?
- Total number of lamps required.
- Power Input - AC or DC? What input voltage?
- Extension connection tabs for backlighting applications are standard at 2" long. This allows connector to be hidden. Please advise if longer lengths are required.

ADDITIONAL INFORMATION:

- Custom widths are possible to fit any dimensions. Light Tape can be tiled and joined together with no seams or gaps.
- Power input location (please specify short or long side of lamp)
- A basic top or front view drawing with dimensions is helpful to our engineering team to estimate materials needed.
- We will suggest best electrical configuration for your project based on site layout.

TOP VIEW

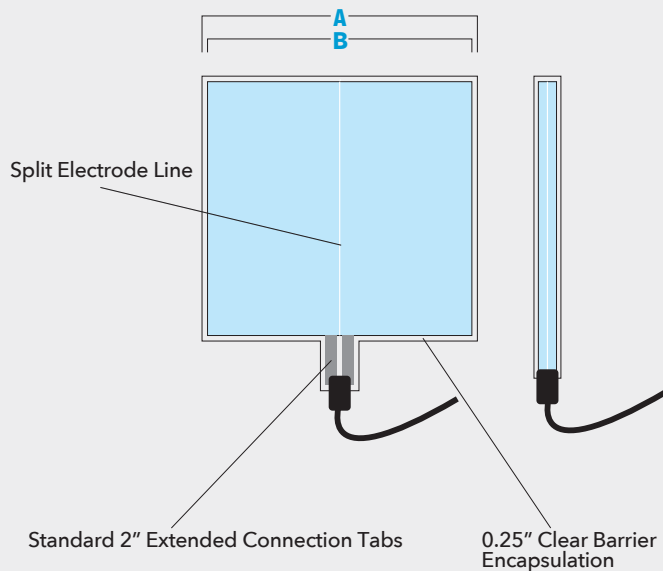

NOTE: the split electrode line is a critical element of Light Tape's engineering that runs centered through the entire length.


CROSS SECTION - SPLIT ELECTRODE




Color Options

Our base colors are Classic Natural Blue and Extreme Blue-Green. These colors appear white when off and colored when illuminated. We then all a filter to produce specific color options. All other colors will remain that color when not illuminated. Please check our website for updated and new colors.

CLASSIC SERIES

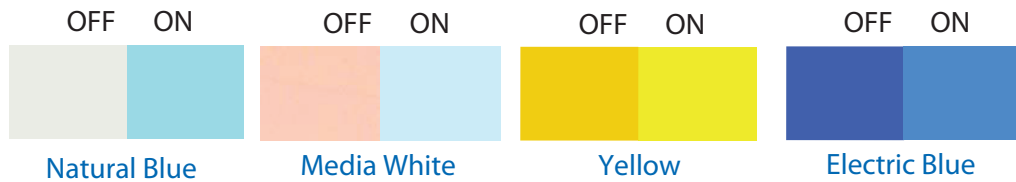

EXTREME SERIES

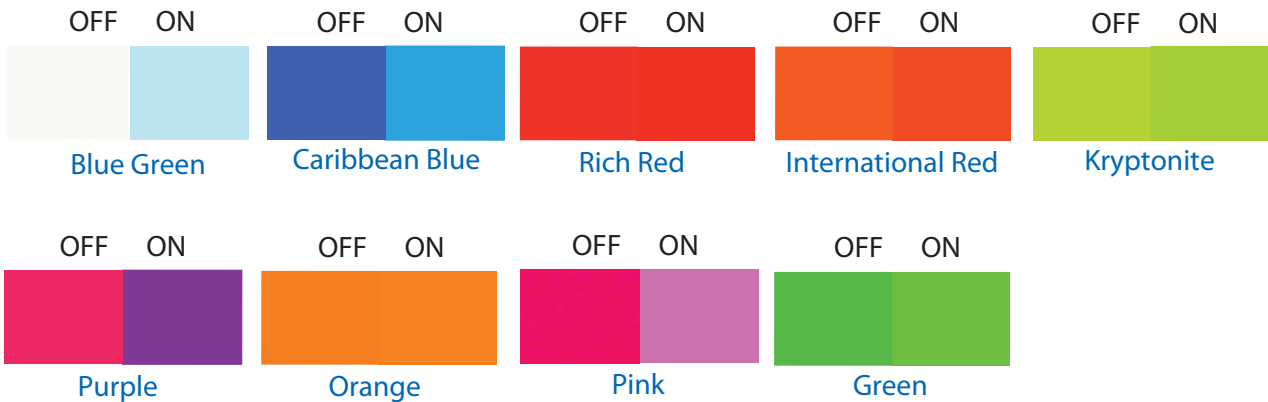

*The colors in this table are simulated and the final product may vary. If an exact color is required, we recommend seeing a physical sample. Custom colors and widths are available, but may be subject to minimum order quantities, set-up fees, and approval testing.

Light Tape® System Specifications

Light Tape® Physical Specifications	
Thickness (varies depending on color)	0.010 to 0.020 inches / 0.254 to 0.305 millimeters
Protective Encapsulation Seal	¼" on each side (+/-1/16" of an inch, +/- 0.159 cm)
Light Tape® Illuminated Width	0.25 to 30 inches / 0.625 to 90 cm
Illumination Coverage	Infinite, can be tiled without a break in light
Power System	
Light Tape® Load	Capacitive Load
Phase Angle	78° Leading Edge
Light Tape® Power Consumption by Area	0.016 watts per in ² / 0.106 watts per cm ²
Light Tape® Amperage Consumption by Area**	0.19 milliamps per in ² / 1.23 milliamps per cm ²
Light Tape® Watts per Linear Meter at 2.54 cm wide	0.4 to 1.1 watts based on low to full brightness dimming
Light Tape® Watts per Square Meter	0.21 to 0.53 watts based on low to full brightness dimming
Light Tape® Output Voltage (dimmable)	250 Volts AC, +/- 50 Volts AC
Light Tape® Operating Frequency	800 Hertz, +/- 300 Hertz (depending on tuning)
AC Driver Input Voltage Range	90 to 260 Volts AC
DC Driver Input Voltage Range	3 to 24 Volts DC (12 Volts DC standard)
Power Source	ELLC Smart Driver™ Power Supplies
Controllable	Dimming, 0 to 10 Volts DC and DMX 512 Capable
Light Tape® Performance	
Useful Life - Hours	20,000 hours to excess of 40,000 hours
Useful Life - Years	up to 20 years (dependent on drive parameters)
Average Brightness	125 cd/m ²
Brightness Range	0 to 200 cd/m ²
Brightness Differential - Completely Uniform	+/- 1 cd/m ² , independent of total surface area
Operating Temperature - Ambient	-40°C to +65°C
Heat Gain During Operation	Does not produce heat during operation
Compressive Strength - Ground Pressure	500 psi or more depending on mounting system
Impact Strength - Izod (73F)	6.5 ft-lbs/in ²
Flexural Strength	700 >15,000 cycles ASTM D2176
Flexibility - Wrap Angle	Contours around 6 millimeter diameter object
Punctureable	Yes, will illuminate after puncturing
Maximum Processing Temperature	350°F / 177°C (depending on residence time)
Health and Safety	
Safety Features	Overload and short circuit protection. UL listed.
UL Certifications	File number E319670, 2006/95/EC
CE Certification	EC-Attestation of conformity – No.0704 63147 001
Low Voltage Directive	Compliant
Environmental Compliance	ROHS and WEES Directive
EMC Emissions Compliant	EN55015 (CISPR15) Radiated and Conducted Emission

**BROUGHT TO YOU BY:
ELECTRO-LUMINX® LIGHTING
CORPORATION**

Electro-LuminX® Lighting Corporation, the manufacturer of Light Tape®, is located in the booming Mid-Atlantic creative hub of Richmond, Virginia. The company formed in 2004 in order to bring a truly unique lighting source to market that challenges preconceived notions of lighting.



Electro-LuminX Lighting Corporation

USA

1320 N. Boulevard
Richmond, VA 23230
+1 804 355 1692

European Office (GMT)
Russell Conway
Business Development Leader
russellconway@lighttape.com
Tel: +44 7860 967410
Skype: +44 114 360 9192